

SIMERA SERIES LENS USER'S MANUAL

A Gateway To Authenticity.

The profound focus on "everyday life" in contemporary art is challenging yet essential. It requires forms and techniques to capture its rich meaning while avoiding oversimplification.

We are free to explore this space, unencumbered by preconceived notions, untethered by assumptions, and immersed in the unexplored depths of our own experience.

Simera offers a new way of seeing, a window into the present. Like a portal, it transports us beyond the constraints of the ordinary, revealing a world of hidden grandeur and subtle majesty.

Contents

P₁

[Introduction](#)

P₁

[Safety Notes](#)

P₂

[Lens Parts](#)

P₃

[Lens Control](#)

P₄

[Assembly
/Disassembly](#)

1. Lens Assembly and Disassembly
2. Hood Assembly and Disassembly

P₅

[Depth of Field
Scale Reading](#)

P₆

[Rangefinder Focus](#)

P₇

[Specification](#)

P₈

[After-sales Service](#)

P₁₀

[The Name and Content of Hazardous Substances](#)

Note



Click to go

Users can read the table of content(TOC) to have an overview of the Simera Product Manual. Please click on the title or link to jump to the TOC.



Search keyword

The Search-keyword Function is available in PDF Document. For example, In WPS Office, Windows users can search keywords with the keyboard shortcut <Ctrl+F> and Mac users can execute the same function with shortcut <Command+F>.


Thank you for purchasing a Thypoch product!

The Simera series is a full-frame, high-performance mirrorless prime lens produced by Thypoch.


Before using this lens, please read the user's manual carefully to learn the proper way to use and store it.

Safety Notes

- ▶ Please do not watch the sun or bright light source through the lens, otherwise it will cause visually disabled.
- ▶ Never use organic solvents such as paint thinner or benzene to clean the lens.
- ▶ Attach the front and rear caps when the lens is not in use.
- ▶ Store the lens and filter in cool, dry locations to prevent mold and rust. Do not store in direct sunlight or with naphtha or camphor moth balls.
- ▶ Please keep the lens dry and wipe the water droplets off if there are water droplets on the glass surface.
- ▶ Leaving the lens near heater or in other extremely hot locations could cause damage or warping.
- ▶ Use a blower to remove dust and lint from the glass surfaces of the lens or filter. To remove smudges and fingerprints, apply a small amount of lens cleaner to a soft, clean cotton cloth or lens-cleaning tissue and clean from the center outwards using a circular motion. Do not leave smears or touch the glass with your finger.

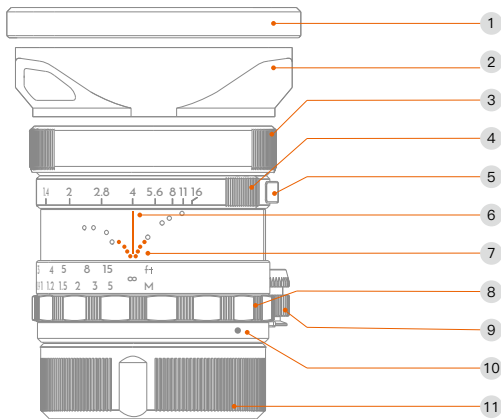


- | | |
|--|--|
| 1 Front cap for lens hood | 6 Lens mark |
| 2 Lens hood | 7 Depth of field scale |
| 3 Front cap | 8 Focus ring |
| 4 Aperture ring | 9 Focus ring locking wrench |
| 5 Switching button for stepless adjustment | 10 Bayonet installation identification |
| | 11 Rear cap |



Focus Ring

Focus Control


Rotate the focus ring to increase or decrease the focus distance.



Aperture Ring

Aperture Control

Rotate the aperture ring to enlarge or reduce the diameter of the aperture, adjusting the brightness of the image and the bokeh effect of the subject's background.



Step/stepless adjustment

Step/stepless adjustment

Slide the adjustment button on aperture ring to change step or stepless mode of aperture.

1. Lens Assembly and Disassembly

Please turn off your camera power before the lens assembly and disassembly.


Remove the lens rear cap



1.1 Lens Assembly

Remove the rear cap. Align the marks in the lens mount and camera mount, and turn the lens mount in the clockwise direction until you hear the click.

Mount Release Button




1.2 Lens Disassembly

Press the lens mount release button and remove the lens from the camera by turning the lens in the counterclockwise direction.

Note: After removing the lens from the camera, please use the lens rear cap and keep the front part of lens up to avoid the scratching.


2. Hood Assembly and Disassembly



2.1 Hood Assembly

Aligning the concave part near the hole in the lens hood, with the convex part in the front of the lens, turn the hood in the clockwise direction until you hear the click.

Note: After assembly, the hole in the lens hood should be in the top right corner when you see it from the front of the lens.




2.2 Hood Disassembly

Remove the lens hood in the counterclockwise direction.

Depth of Field Scale Reading

[▶ Back to Contents](#)

The lens mark are shown as orange lines in the figure below



The depth of field range is the scale range corresponding to the vertical straight line from the lit leftmost orange dot to the rightmost orange dot.


Adjusting the aperture stop or focusing distance will change the depth of field range. For example, as shown in the figure below, when the aperture is F4 and the focusing distance is infinity, the depth of field range at this time is roughly 10m~infinity.

Note: The depth of field scale is only intended for approximate reference, not the exact range.

How to use trap focus

1. Predict the movement of the subject in advance;
2. Adjust the aperture and focus ring so that the depth of field range is larger than subject's movement range;
3. The subject moves along the pre-determined movement trajectory, and in this case the subject will remain in focus in the image.

1. Mount the lens to a camera with rangefinder focus function (e.g. Leica M series cameras);
2. Visualize the viewfinder frame and rotate the focus ring so that the superimposed image in macular area coincides with the subject (as shown below).

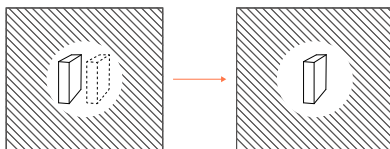

3. Observe the camera screen, at this time the subject is in focus and clear.

Notes:

- (1) The rangefinder focus functions only from 0.7m to infinity;
- (2) The rangefinder focusing range may vary in different camera models;
- (3) Please check the range of rangefinder focus on your camera.

Specification

[▶ Back to Contents](#)

Name		Simera	
Colour		Black/Silver	
Focal Length		28mm	35mm
Mount		M	
Aperture		F1.4–F16	
Image Circle		43.2mm (FF)	
Construction of Optics		11 Elements in 7 Groups	9 Elements in 5 Groups
Flange Distance		27.8mm (M)	
Angle of view (diagonal, horizontal, vertical)		75°/65°/45°	64°/55°/38°
Type of focusing		Manual focus	
Close Focus (from sensor plane)		0.4m/1.4ft	0.45m/1.5ft
Front Dia		φ54mm/2.12"	
Filter Size		M49	
Length		50.8mm/2" (without hood) 64.8mm/2.55" (with hood)	50.8mm/2" (without hood) 64.8mm/2.55" (with hood)
Iris Blade		14	
Weight (Product)		≈330g	≈352.5g
Accessories		lens hood & front cap	

How to Obtain After-Sales Service

If a product does not function as warranted during the warranty period, you may obtain after-sales service by contacting Thypoch support team or Thypoch's authorized dealers. Charges may apply for services not covered by this After-Sales Policy.

The After-Sales Policy varies with the country or region of purchase. Please contact Thypoch for information specific to your location.

Warranty Service

Thypoch grants a minimum warranty period of one and a half year from the date of purchase for lenses purchased through Thypoch's official dealers. Thypoch warrants that each Thypoch product that you purchase will be free from material and workmanship defects under normal use in accordance with Thypoch's user's manual and accompanying documentation during the warranty period. You may claim warranty service by returning it to the point of purchase. The owner is responsible for all shipping costs. The warranty period varies with the country or region of purchase. Stored proof of purchase in a safe place, as you will need to provide a valid proof-of-purchase for the warranty service. Parts replaced during the warranty service become Thypoch's property.

Service Outside the Warranty Period

Request for after-sales service will normally be accepted within a period of roughly 5 years following the end of production, during which time spares will be kept on hand, although owners may be offered an equivalent product during this period in the event that spares are not available. The specific cost standard is subject to Thypoch's quotation. Compatibility with consumables and accessories for the original product is not guaranteed. To prevent waste, Thypoch may collect returned parts or products.

Service Turn Around Time

After we receive the product, the after-sales service will generally be completed within two weeks. This turn around time does not include the time of return shipping. If there are special circumstances, we will notify you in advance.

What This After-Sales Policy Does NOT Cover

This after-sales policy does not cover the following and charges may apply:

- No valid proof-of-purchase of the product.
- Damage caused by unauthorized modification, disassembly, or repair not in accordance with official instructions or manuals.
- Damage caused by improper installation and operation not in accordance with official instructions or manuals.
- Damage caused by the storage environment not in accordance with official instructions or manuals.
- Damage caused by operation in bad weather or environment (i.e. rain, sand/dust storms, humid environment, etc.).
- Damage caused by, any third party products, including those that Thypoch may provide or integrate into the Thypoch product at your request.
- Damage caused by any third-party product.
- Damage caused by force majeure.
- Consumable accessories and optional parts that come with this product.

Privacy

Thypoch obeys all applicable laws and regulations concerning the handling of names, addresses, phone numbers, and other personal information provided by users.

The Name and Content of Hazardous Substances

► [Back to Contents](#)

Part Name	Hazardous Substances					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Lens Shell	○	○	○	○	○	○
Inner Mechanics	×	○	○	○	○	○
Optics	○	○	○	○	○	○
Other Parts	○	○	○	○	○	○

This table is formulated in accordance of SJ/T11364.

○: Indicates that the concentration of the hazardous substance in all homogeneous materials in the parts is below the relevant threshold of the GB/T26572 standard.

×: Indicates that the concentration of the hazardous substance of at least one of all homogeneous materials in the parts may be above the relevant threshold of the GB/T26572 standard.

The "×" in the above table indicates that there are one or more exemptions are applied in the parts stated in RoHS (2011/65/EU).



Shenzhen xuchi optics technology co., Ltd.

1F., Building Three, Xinwuxia Industrial Park, No.32,
Cuibao Rd., Baolong St., Longgang Dist. ShenZhen, China

SEEING INTO ETERNITY



www.thypoch.com



WECHAT: Thypoch



FB & INS: Thypoch