

VITEC  
PRODUCTION  
SOLUTIONS



Two legendary brands  
**ONE REVOLUTIONARY TRIPOD**

[flowtech-tripod.com](http://flowtech-tripod.com) 



Presenting  
**flowtech**™

Revolutionise the way you work with the  
world's fastest tripod.

75mm 100mm

VITEC  
PRODUCTION  
SOLUTIONS








## flowtech™ Technology

Multi-award winning **flowtech™** is incredibly fast, lightweight and easy to set up and adjust compared to any other tripod, giving the camera operator ultimate versatility and improving their workflow.

Performance tested in extreme conditions, **flowtech™** is a revolution in tripod technology. Try it and join the revolution.



Two legendary brands  
**ONE REVOLUTIONARY TRIPOD**

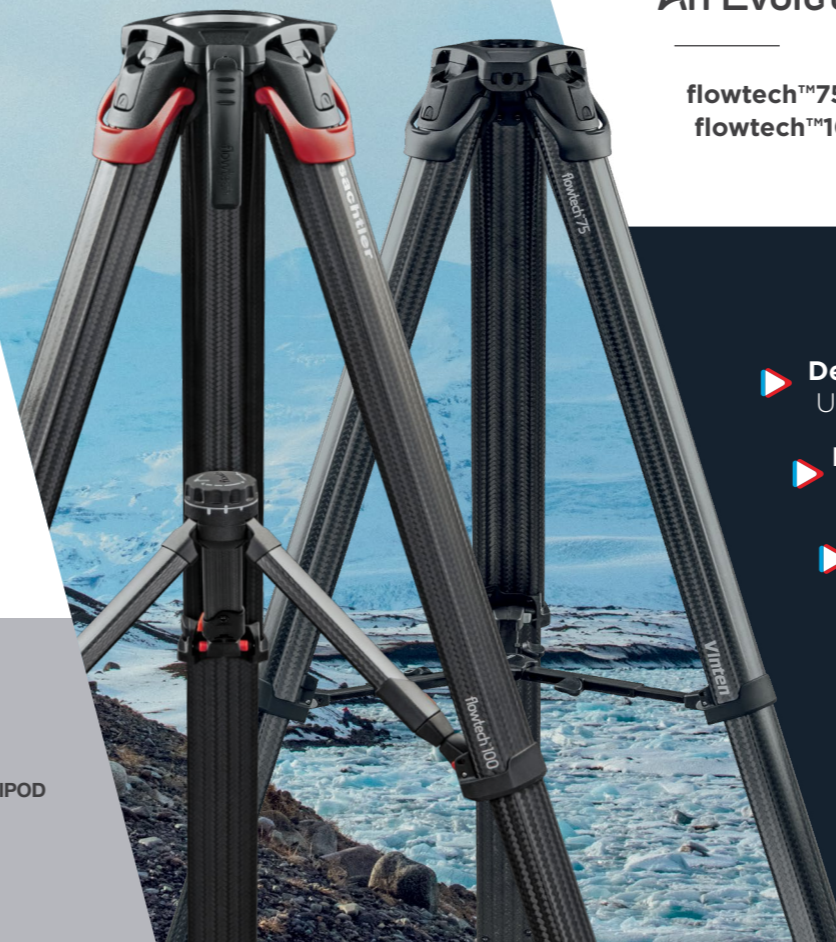

## An Evolution in Tripod Technology

**flowtech™75** is for lighter camera set-ups to 20kg / 44lb  
**flowtech™100** is for heavier camera set-ups to 30kg / 66lb.

- ▶ **Deploy and adjust your tripod in an instant:**  
Unique quick release brakes
- ▶ **Easy to transport and exceptional torsional stiffness:**  
New ergonomic carbon fibre leg design
- ▶ **Capture extremely low and high shots:**  
Versatile hinge lock mechanism
- ▶ **Fast stable setup in narrow spaces and on uneven terrain:**  
Unique carbon fibre mid-level spreader\*
- ▶ **Superior performance and reliability:**  
Extensive endurance and environmental testing


\*Included as standard in all flowtech100 systems.  
Optional accessory for flowtech75.



## Unique Quick Release Brakes

Located at the top of the tripod, the quick release brakes enable the legs to be deployed simultaneously and can quickly adjust to the height that you need and the ground's surface - eliminating the need to bend over or manually adjust multiple brakes on each leg.

Deploy and adjust  
in an instant

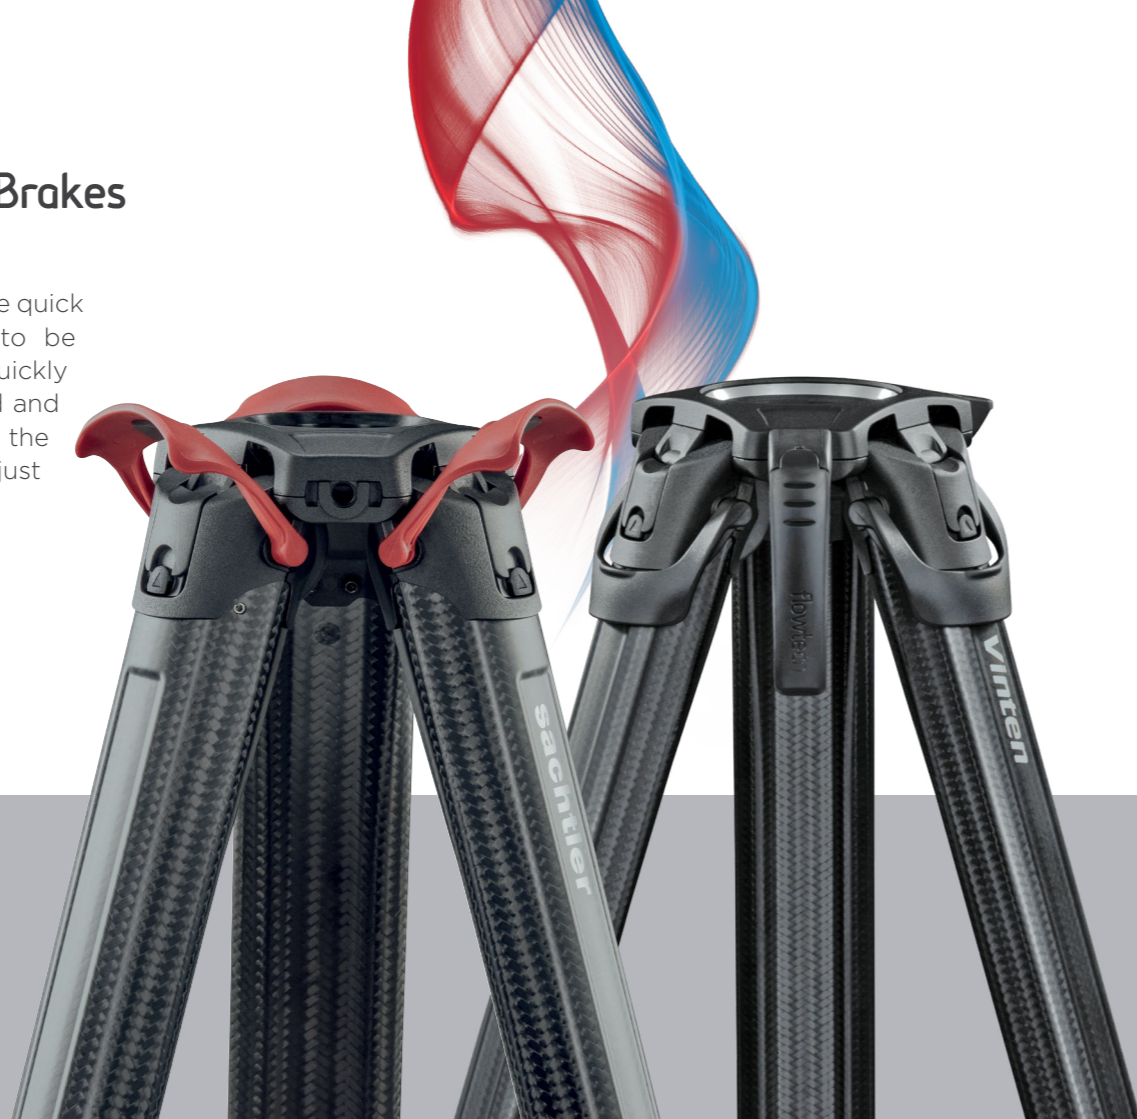

## Ergonomic carbon fibre design

**flowtech™75** and **flowtech™100** are lightweight and easy to transport. The ergonomic design provides a comfortable shoulder position and strong magnetic leg locks ensure the tripod legs remain secured.



Lightweight and Exceptional Torsional Stiffness

Exceptional torsional stiffness ensures the tripod doesn't twist during panning movements.





## Versatile Hinge Lock

flowtech's unique hinge lock allows you to capture extremely low, ground-level shots along with higher shots. This effectively eliminates the need to take a set of baby legs to the shoot.



Capture extremely low and high shots



## New Foot Mechanism

flowtech's new quick attach and release foot mechanism easily adapts to the ground's surface.




New easy to use foot mechanism





### Accessory Mount

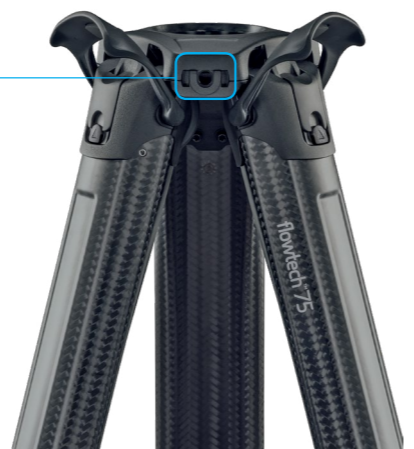

flowtech's tripod bowl has 3 x 3/8in threads which can be used for attaching a magic arm or the flowtech attachment mount to hang a bag, battery pack or an optional carrying strap.

Easily attach optional accessories

### flowtech™100 Carbon Fibre Mid-Level Spreader

For a fast and stable setup in narrow spaces or on uneven terrain, the flowtech100 mid-level spreader has four locking positions for simple setup and fast repositioning.

The spreader is included in all **flowtech™100** tripod and system packages and available as an optional accessory for **flowtech™75**.



Fast stable setup in narrow spaces on uneven terrain





## Performance Tested

Tested in the most punishing environments, flowtech excels in sludge, sand and extreme temperatures. Furthermore, over 30,000 deployment cycles and 1.5 million clamp operations on an endurance rig, flowtech surpasses Sachtler and Vinten's stringent performance targets.



## Specifications

2-stage carbon fibre tripod with quick release brakes, mid-level spreader and rubber feet.

flowtech is compatible with all major 75mm and 100mm fluid heads and is ideally suited to fluid heads from the Sachtler or Vinten product families

flowtech™75

flowtech™100



SKU	Sachtler: 4585	Vinten: V4150-0003	Sachtler: 5585	Vinten: V4160-0003
Payload	20kg / 44lb		30kg / 66lb	
Tripod bowl	75mm		100mm	
Tripod material	Carbon fibre		Carbon fibre	
Spreader material	Aluminum		Carbon fibre	
Weight (Tripod only)	2.9kg / 6.4lb		3.2kg - 7.01lb	
Weight (Tripod with rubber feet and mid-level spreader)	3.5kg / 7.7lb		4.1kg / 9.04lb	
Spreaderless mode height range	26 - 153cm / 10.2 - 60.2in		26 - 153cm / 10.2 - 60.2in	
Mid-level spreader height range	63 - 157cm / 24.8 - 61.8in		52 - 155cm / 20.5 - 61in	
Transport length	68cm / 26.7in		68cm / 26.7in	
Extension	2x		2x	



A photograph of an industrial robotic arm in a factory. The arm is orange and black, with the brand name 'KUKA' visible on its side. It is positioned in front of a large, teal-colored industrial machine. The background shows a factory interior with various pipes and equipment. The text 'MANUFACTURING EXCELLENCE' is overlaid on the bottom left of the image in a bold, yellow and white font.

# MANUFACTURING EXCELLENCE

## Internal expertise from design to despatch

**flowtech™** tripods are designed and engineered by Sachtler and Vinten at a purpose-built 66,000 square foot manufacturing facility in the United Kingdom. A team of 200 work together to create the industry's most popular camera support systems including the world's fastest tripod - **flowtech™**. The state-of-the-art, advanced carbon fibre cell produces tripod legs with remarkable strength, able to deliver exceptional torsional stiffness for the smoothest operation.



Payload range



**Ace XL FT 75 | 1017MS**

2 - 8kg / 4.4 - 17.6lb

Ace XL fluid head (S2150-0004) + tripod flowtech75 MS with mid-level spreader and rubber feet FT (4585) + carry handle (S2051-1057) + padded bag (9116)

**FSB 4 FT MS | 0395**

0 - 4kg / 0 - 8.8lb

FSB 4 fluid head (0307) + tripod flowtech75 MS with mid-level spreader and rubber feet (4585) + carry handle (S2051-1057) + padded bag 75 (9116)

**FSB 6 FT MS | 0495**

1.5 - 8kg / 3.3 - 17.6lb

FSB 6 fluid head (0407) + tripod flowtech75 MS with mid-level spreader and rubber feet (4585) + carry handle (S2051-1057) + padded bag 75 (9116)

**FSB 6 T FT MS | 0465**

1.5 - 8kg / 3.3 - 17.6lb

FSB 6 T fluid head (0405) + tripod flowtech75 MS with mid-level spreader and rubber feet (4585) + carry handle (S2051-1057) + padded bag 75 (9116)

**FSB 8 FT MS | 0795**

1 - 10kg / 2.2 - 22lb

FSB 8 fluid head (0707) + tripod flowtech75 MS with mid-level spreader and rubber feet (4585) + carry handle (S2051-1057) + padded bag 75 (9116)

**FSB 8 T FT MS | 0765**

1 - 10kg / 2 - 22lb

FSB 8 T fluid head (0705) + tripod flowtech75 MS with mid-level spreader and rubber feet (4585) + carry handle (S2051-1057) + padded bag 75 (9116)



Payload range



**FSB 10 FT MS | S2045FTMS**

4 - 12kg / 8.8 - 26.5lb

FSB 10 fluid head (S2045-0001) + tripod flowtech100 MS with mid-level spreader and rubber feet (5585) + padded bag ENG (9104) + carry handle (S2051-1057)

**FSB 10 T FT MS | S2046FTMS**

4 - 12kg / 8.8 - 26.5lb

FSB 10 T fluid head (S2046-0001) + tripod flowtech100 MS with mid-level spreader and rubber feet (5585) + padded bag ENG (9104) + carry handle (S2051-1057)

**DV 12 FT MS | 1205FTMS**

1 - 15kg / 2 - 33lb

DV 12 fluid head (1205) + tripod flowtech100 MS with mid-level spreader and rubber feet (5585) + padded bag ENG (9104) + carry handle (S2051-1057)

**Video 15 FT MS | 1505FTMS**

1 - 17kg / 2 - 37lb

Video 15 fluid head (1505) + tripod flowtech100 MS with mid-level spreader and rubber feet (5585) + padded bag ENG (9104) + carry handle (S2051-1057)

**Video 18 FT MS | 1811FTMS**

2 - 22kg / 4 - 48lb

Video 18 fluid head (1811) + tripod flowtech100 MS with mid-level spreader and rubber feet (5585) + Speedlevel Clamp (S2044-0001) + padded bag ENG (9104) + carry handle (S2051-1057)

**Cine 7+7 FT MS | 1910FTMS**

2 - 22kg / 4 - 48lb

Cine 7+7 fluid head (1910) + tripod flowtech100 MS with mid-level spreader and rubber feet (5585) + Speedlevel Clamp (S2044-0001) + padded bag ENG (9104) + carry handle (S2051-1057)



Payload range



**Vision blue FT | VB-FT**

2.1 - 5kg / 4.6 - 11lb

Vision blue fluid head (V4092-0001) + flowtech75 with rubber feet and soft case 75 (V4150-1850) + carry handle (S2051-1057)



**Vision blue3 FT MS | VB3-FTMS**

3 - 6.6kg / 6.6 - 14.6lb

Vision blue3 fluid head (V4106-0001) + flowtech75 MS (V4150-0003) and soft case 75 (V4150-1850) + carry handle (S2051-1057)



**Vision blue5 FT MS | VB5-FTMS**

5 - 12kg / 11 - 26.5lb

Vision blue5 fluid head (V4105-0001) + flowtech75 MS (V4150-0003) and soft case 75 (V4150-1850) + carry handle (S2051-1057)



**Vision 8AS FT MS | V8AS-FTMS**

5.5 - 14.0kg / 12.1 - 30.9lb

Vision 8AS (V4045-0001), flowtech100 MS tripod (V4160-0003) & soft case (3358-3) + carry handle (S2051-1057)



**Vision 10AS FT MS | V10AS-FTMS**

6.5 - 17.0kg / 14.3 - 37.5lb

Vision 10AS (V4046-0001), flowtech100 MS tripod (V4160-0003) & soft case (3358-3) + carry handle (S2051-1057)



**Vision 100 FT MS | VB100-FTMS**

7.0 - 20.0kg / 15.4 - 44.1lb

Vision 100 (3466-3), flowtech100 MS tripod (V4160-0003) & soft case (3340-3) + carry handle (S2051-1057)



Payload range