



5.5" FHD CAMERA-TOP MONITOR

Specific Monitor by LILLIPUT with Broadcast Quality for Full HD Camcorder & DSLR Application for CCTV Monitoring & Making Movies.



Excellent Display

It features 5.5" 16:9 IPS panel with 1920x1080 full HD resolution (401ppi), 1000:1 high contrast, 160° wide viewing angles, 450cd/m² high brightness, which offers outstanding viewing experience.



Durable Protection

Metal housing with silicon rubber case, which provides a perfect protection from shock and drop. It's also convenient for applications in complex outdoor environment when accompanying with sun shade.



Cross Conversion

The HDMI output connector can actively transmit an HDMI input signal or output an HDMI signal that has been converted from an SDI signal. In short, signal transmits from SDI input to HDMI output and from HDMI input to SDI output.





Advanced Functions

Lilliput creatively integrated column (YRGB peak), time code, waveform, vector scope & audio level meter into field monitor. These assist users to accurately monitor when shooting, making and playing movies/videos.



Slim & Portable Design

Slim and light weight design with hot shoe mounts, which are available for a 5.5 inch monitor fixed on the top of DSLR camera and camcorder.

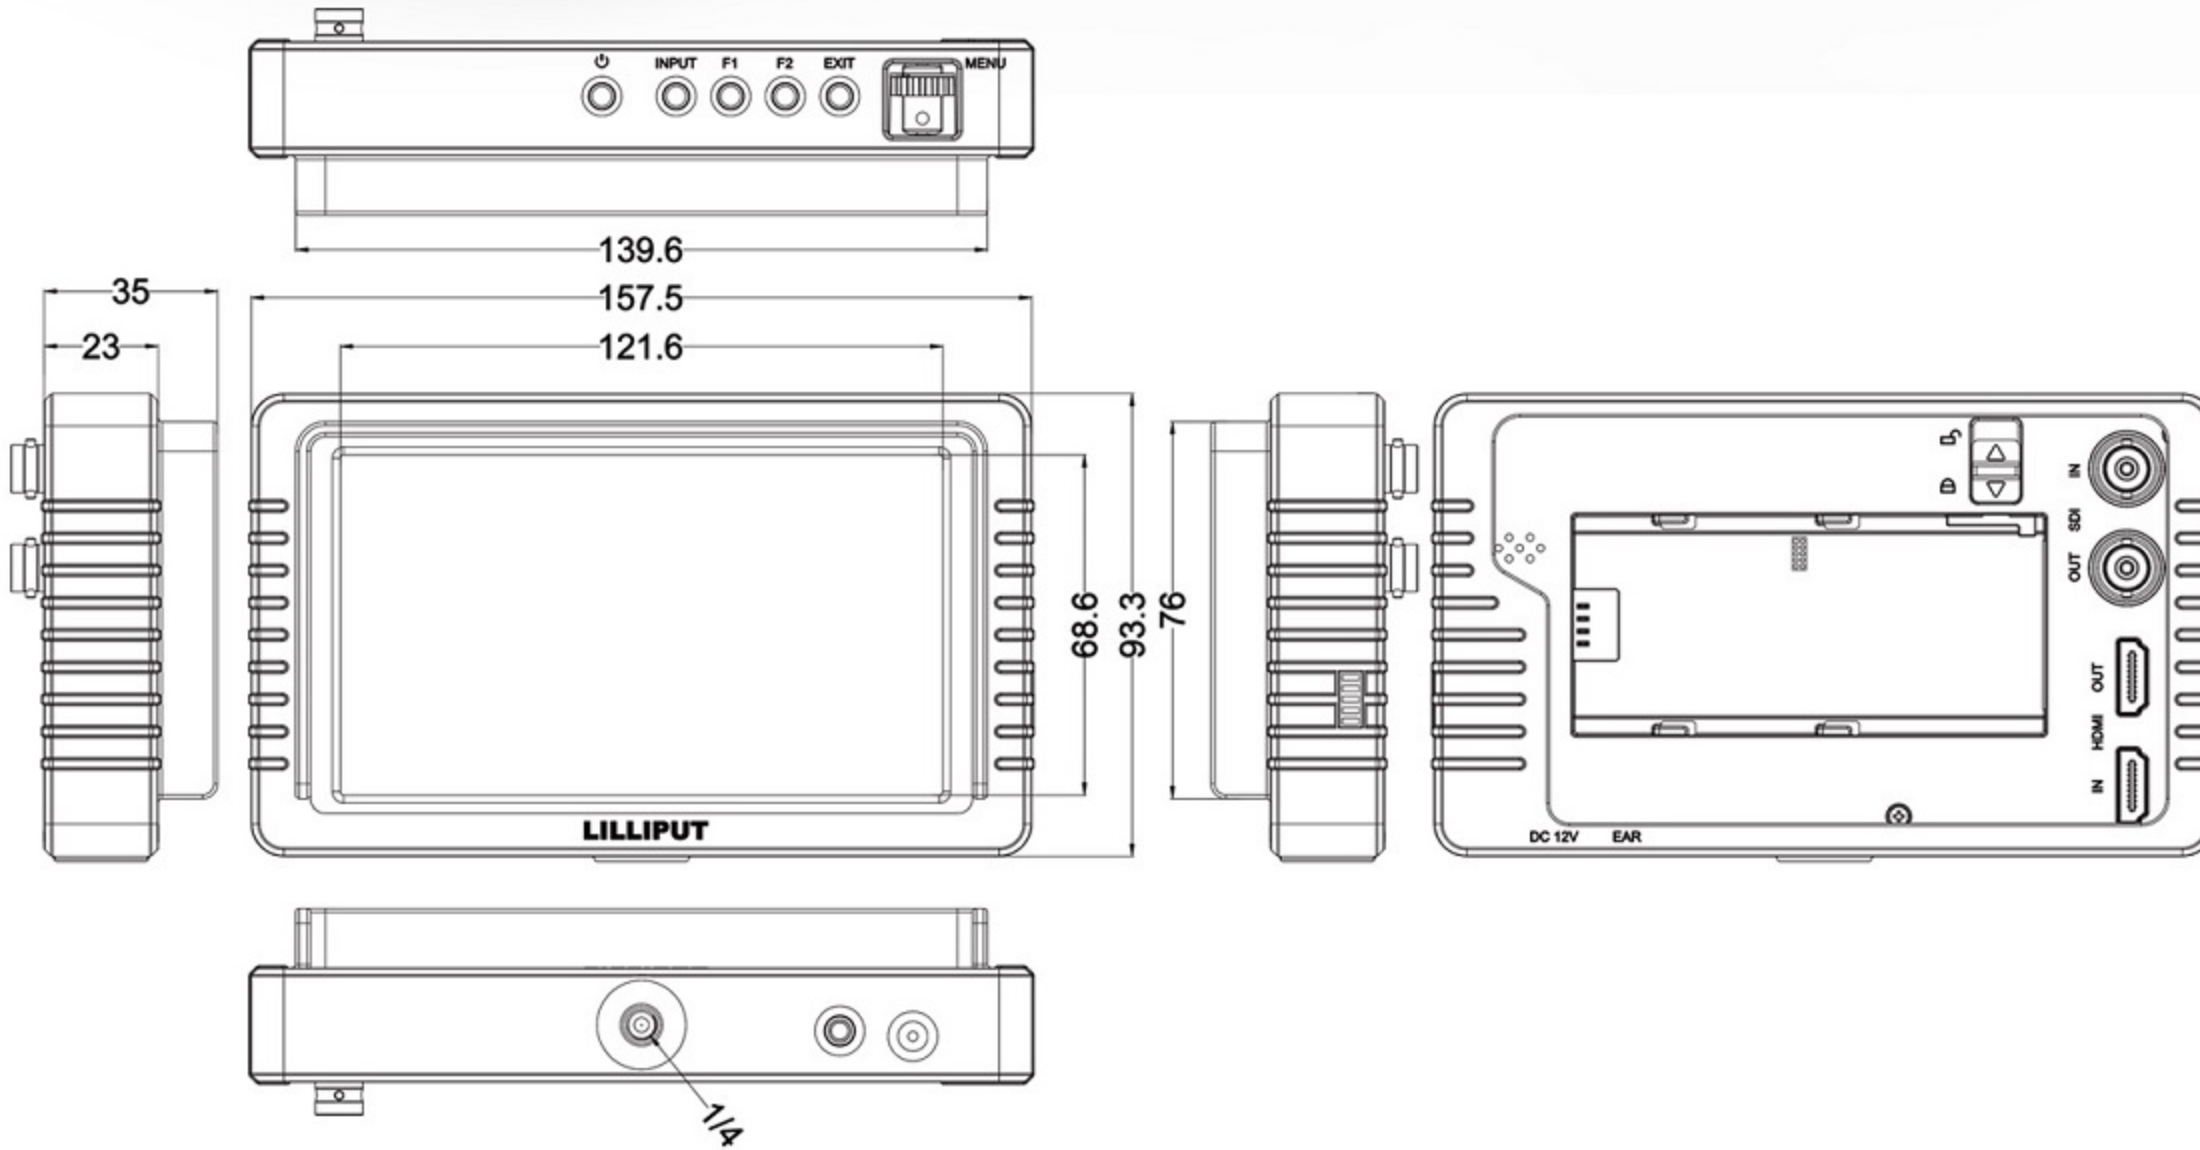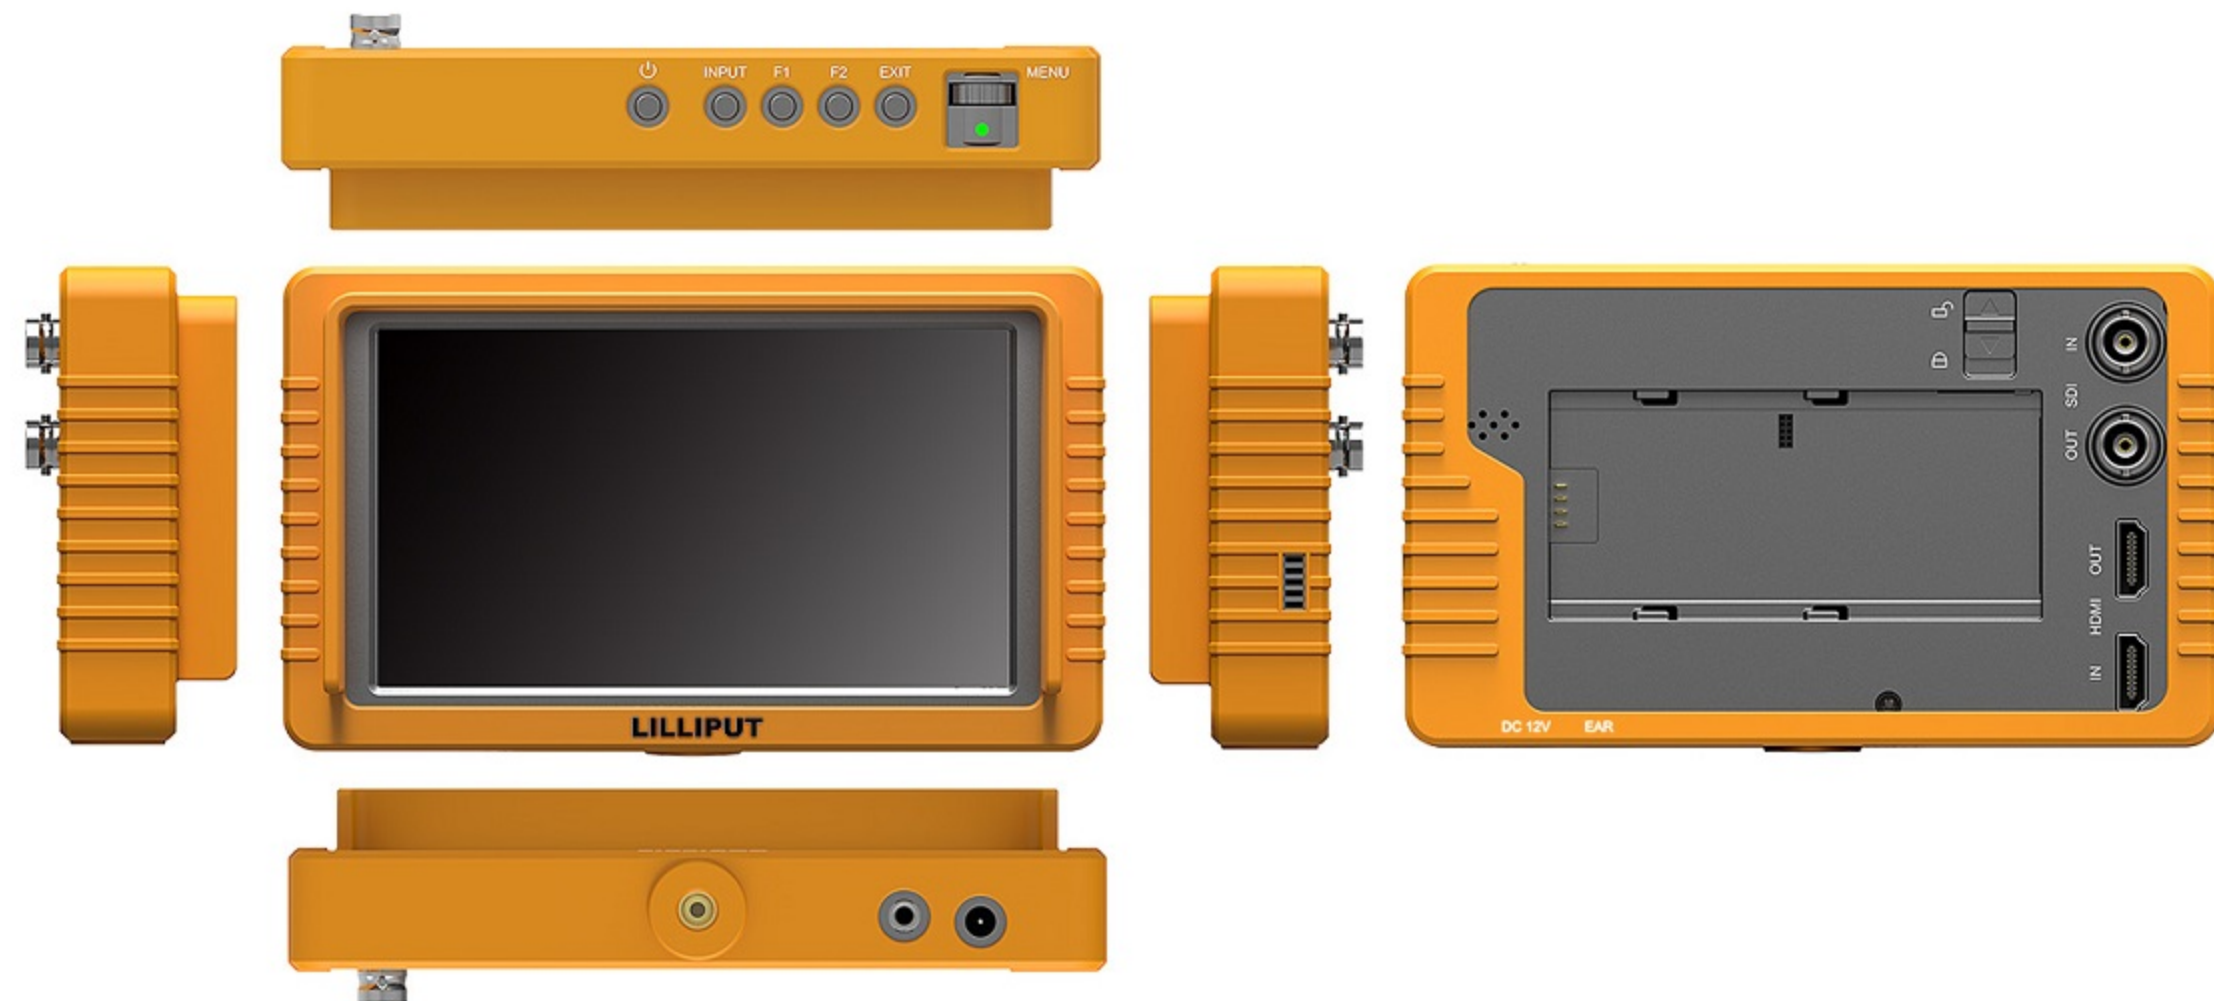

SPECIFICATIONS / ACCESSORIES

DISPLAY	Panel	5.5" IPS
	Physical Resolution	1920×1080 (401ppi)
	Aspect Ratio	16:9
	Brightness	450cd/m²
	Contrast	1000:1
	Viewing Angle	160°/ 160° (H/V)
INPUT	3G-SDI	1
	HDMI	1
OUTPUT	3G-SDI	1
	HDMI	1
AUDIO	Speaker	1
	Ear Phone Slot	1
POWER	Current	1A
	Input Voltage	DC 7-24V
	Battery Plate	F-970 / QM91D / DU21 / LP-E6
	Power Consumption	12W
ENVIRONMENT	Operating Temperature	-20℃~60℃
	Storage Temperature	-30℃~70℃
DIMENSION	Dimension(LWD)	154.5×90×20mm / 157.5×93×23mm (with case)
	Weight	320g / 340g (with case)

SDI Format	SMPTE-125M	480i(59.94)
		1080i(60/59.94/50)
	SMPTE-274M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-292M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-296M	720p(60/59.94/50/30/29.97/25/24/23.98)
		720p(60/59.94/50)
	SMPTE-372M	1080i(29.97/25/24/23.98)
		1080p(60/59.94/50/30/29.97/25/24/23.98)
	SMPTE-425M-AB	1080p(60/59.94/50)
	-Level A & Level B	720p(60/59.94/50/30/29.97/25/24/23.98)
HDMI Format	-Level B 2x	1080i(60/59.94/50)
	ITU-R BT.656	576i(50)
		1080p, 1080i, 720p, 576p, 576i, 480p, 486i

ACCESSORIES

1. Silicon rubber case	1 piece
2. Folding sun shade cover	1 piece
3. 12V DC adapter	1 piece
4. HDMI A/C cable	1 piece
5. Shoe mount	1 piece
6. Battery plate (F-970, QM91D, DU21 or LP-E6)	2 pieces
7. Manual	1 copy
8. Battery (optional)	1 piece

Note: Due to constant effort to improve products and product features, specifications may change without notice.

