

# SWIT®

## 21.5" 1500nits Field Monitor

- ✓ All-around Protection
- 👤 Flight Case Option
- 🔄 Scene OS Page Switch

### ■ Features


- > 21.5" 1920×1080 FHD 10bit IPS Panel
- > 1500nits High Bright Sunlight View
- > Rubber Corner Anti-crash Guards
- > Screen Protective Glass, Quick Release
- > Interchangeable 1/4 & 3/8 Cheese plates
- > VESA to C-stand Mounting Adaptor
- > Provide One-stop Flight Case Version
- > 2K/3G/HD/SD-SDI & 4K-HDMI Monitoring
- > Built-in Multi-Camera Delog Luts SDR & HDR
- > 10× User 3DLuts Cubes Upload by USB-A
- > Automatic 3DLuts Calibration by USB-C
- > Scene OS - 8 Pages Create Quick Switching
- > 4× Function Keys Assigned for Each Scene
- > AC / 4-pin XLR DC / V-mount Battery Power



4× Corner Guards  
Anti-crash



10×10 VESA to  
Light Stand Adaptor

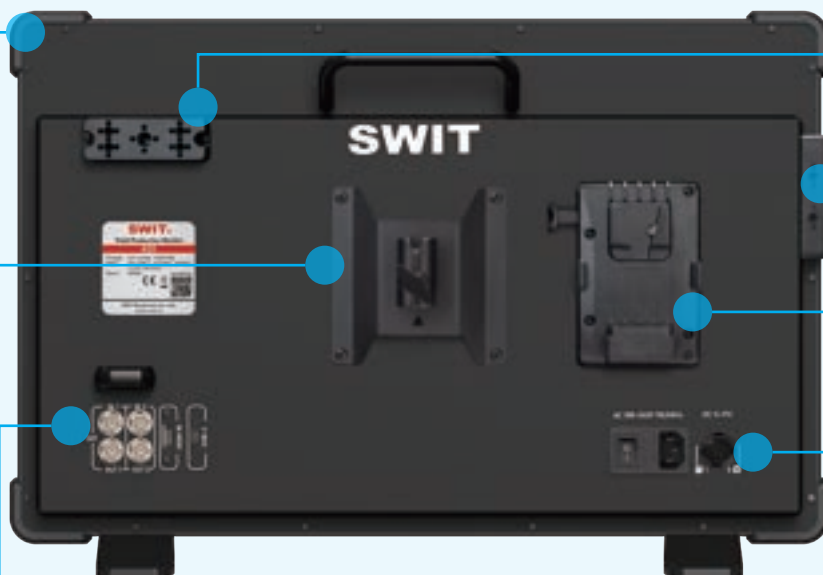

3G-SDI 2-in 2-out  
4K-HDMI 1.4 in  
USB-C Calibration

V-mount Plate  
4-pin DC 11-17V in  
AC 100-240V in



2× Cheese boards  
Rear/Side free install



Protective Glass  
Quick release

## ■ Color Management


### Built-in Delog Luts

| Profile         | Gamma                        | Gamut                                                  |
|-----------------|------------------------------|--------------------------------------------------------|
| EBU             | 2.2 / 2.4 / HLG / PQ         | Rec 709, Rec 2100                                      |
| DCI             | 2.6                          | DCI-P3, P3 D65                                         |
| ARRI            | EI 160 ~ EI 1600             | Alexa Wide Gamut / Rec 709                             |
| RED             | RedLogFilm, Log3G10/1        | Red Wide Gamut, Dragoncolor /2 Redcolor 2/3/4, Rec 709 |
| SONY            | S-log, S-log2, S-log3        | S-Gamut /3 /3.Cine, Rec 709, Rec 2100                  |
| Canon           | C-log, C-log2, C-log3        | Canon Cinema, DCI-P3, DCI-P3+ Rec 709, Rec 2100        |
| BMD             | BMD Film, 4K Film, 4.6K Film | BMD 4K Film, 4.6K Film, Pocket 6K Film                 |
| Panasonic V-log |                              | V-Gamut, Rec 709                                       |
| Fuji            | F-log                        | F-Gamut, Rec 709                                       |
| Nikon           | N-log                        | Rec 2100                                               |

### User 3DLuts Upload

10× User Luts cube file upload by front USB-A port

### Auto 3DLut Calibration

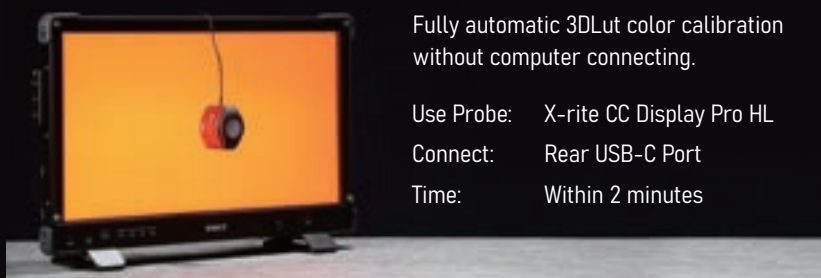

Fully automatic 3DLut color calibration without computer connecting.

Use Probe: X-rite CC Display Pro HL

Connect: Rear USB-C Port

Time: Within 2 minutes

## ■ Specifications

### Display

|                |                   |
|----------------|-------------------|
| Size           | 21.5 inches       |
| Display Area   | 476.06mm×267.78mm |
| Resolution     | 1920×1080, 16:9   |
| Backlight      | White LED         |
| Brightness     | 1500nits Max      |
| Contrast Ratio | 1100:1            |
| Color Depth    | 10-bit            |
| Response Time  | 25ms              |
| Viewing Angle  | 178°H/178°V       |

### Video/Audio Interface

|       |                                       |
|-------|---------------------------------------|
| SDI   | 3G/HD/SD-SDI Input ×2; Loop output ×2 |
| HDMI  | 4K HDMI 1.4 Input ×1                  |
| USB-A | USB-A ×1 User Lut & Firmware          |
| USB-C | USB-C ×1 Auto Calibration             |
| Audio | 3.5mm Headphone & Speaker output      |

### General

|              |                                      |
|--------------|--------------------------------------|
| AC Input     | 100-240V 50/60Hz                     |
| DC Input     | 4-pin XLR, V-mount battery 11-17V 3A |
| Power        | ≤ 55W                                |
| Working Temp | 0°C ~ 40°C                           |
| Dimension    | 531mm×345.7mm×92.7mm                 |
| Net Weight   | 7.74kg                               |

## ■ Package Option

### Standard Package



Screen Protective Glass  
(Pre-installed)



Cheese Plates ×2  
(Pre-installed)



C-stand Adaptor  
(Pre-installed)



Sunhood

### Flight Case Update Kit



Flight Case  
with 2x Top Cheese Plates



C-stand Adaptor



Sunhood

SWIT Electronics Co., Ltd.  
+86-25-85805753  
<http://www.swit.cc>  
Email: [contact@swit.cc](mailto:contact@swit.cc)

SWIT Electronics America, Inc  
1-(408)260-8258  
<http://www.switusa.com>  
Email: [info@swit.us](mailto:info@swit.us)

SWIT Electronics Europe GmbH  
+49(0)2131 6632331  
<http://www.switeu.com>  
Email: [info@swit-europe.com](mailto:info@swit-europe.com)



Facebook Page



Instagram