

Blackmagic Media Dock



\$1,995

Blackmagic Media Dock accelerates your post production workflow by enabling high speed network sharing and upload from up to 3 Blackmagic Media Modules from Blackmagic URSA Cine cameras. 4 x 10G Ethernet ports allow 4 separate edit stations to be connected and edited (?) directly. Blackmagic Media dock also has Ethernet over USB-C, dual AC power inputs for redundancy and an HDMI output for live monitoring of media in real time on a TV or monitor.

Connections

Interface

3 x removable and hot-swappable Blackmagic Media Modules.

USB-C Port

1 x USB 3.0 (up to 5Gb/s). Supports Ethernet Over USB

Computer Interface



USB-C or Ethernet for shared file access, configuration and software updates.

10G Ethernet Ports



4 x 10G BASE-T

HDMI Monitor Outputs

1

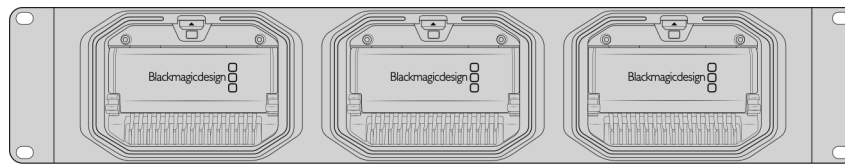

Blackmagic Media Module Bays

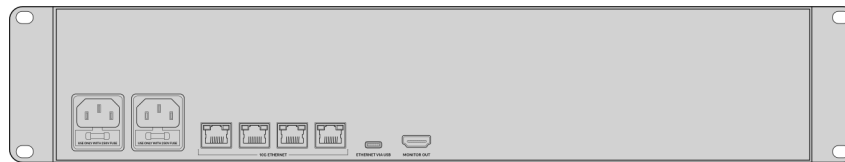

Dual AC Power Inputs 10G Ethernet Ethernet via USB-C HDMI Monitor Out

File Sharing Protocol

Protocol

SMB

Computer Connections

50 max.

Cloud Synchronization

Compatible Services

Dropbox
Google Drive

Storage

Storage Type

Up to 3 Blackmagic Media Modules.

External Storage Format

Blackmagic (formatted in camera)

Displays

HDMI Monitor Out Standards

1080p50, 1080p59.94, 1080p60

Monitor Out Displays

Device Name, storage capacity and use, Cloud Sync status, User Activity, Hardware Status, storage map, network data rate graph.

Status Indicator

LED bezel indicator lights around media module bays.

Device Control

External Control


USB-C or Ethernet for configuration and software updates.

Software

Software Included

Blackmagic Cloud Setup Utility
Blackmagic Proxy Generator Lite
Internal software upgrade via Blackmagic Cloud Setup using USB-C port

Operating Systems



Mac 14.3 Sonoma or later.



Windows 10, 64-bit.
Windows 11.

Power Requirements

Power Supply

Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.


Power Usage

TBA

Physical Installation

2 rack units.

Physical Specifications

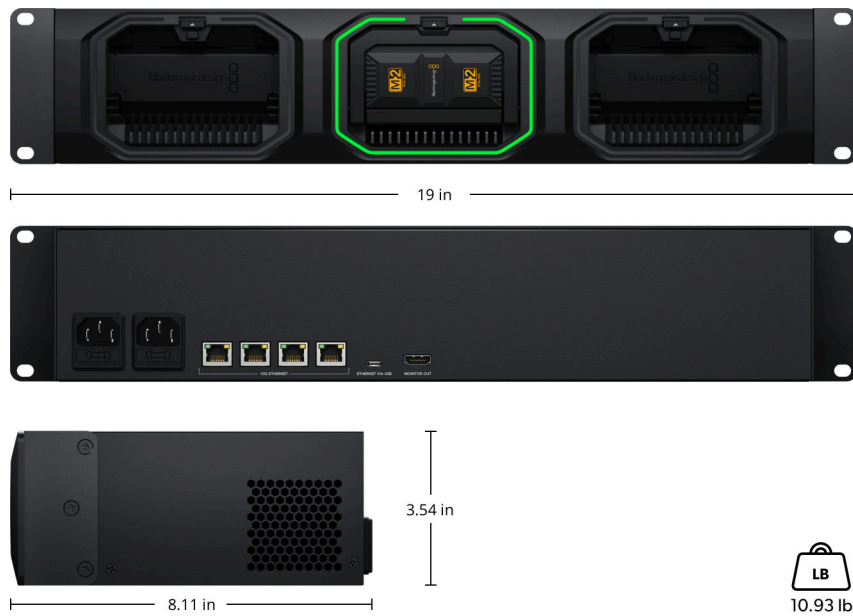

Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic Media Dock

Welcome wallet with QR code for software download

Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller