

NT5

Compact 1/2" Cardioid Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664



Features


- Externally biased condenser
- Gold sputtered 1/2" capsule
- Heavy-duty satin-nickel plated body
- Dual power operation
- Surface mount circuitry
- Low noise
- Full frequency response
- Available as Certified Match Pair
- Designed and manufactured in Australia
- Full 10 year warranty with online registration

Specifications


Acoustic Principle	Pressure gradient
Directional Pattern	Cardioid
Frequency Range	20 Hz-20 kHz
Sensitivity	-38 dB re 1 Volt/Pascal (12 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedence	100Ω
Dimensions	Length - 118mm (4.6456") Diameter - 20mm (0.7874")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	Single - 350g Matched Pair - 1.54kg
Net Weight	101g

Incl. Accessories


- Single - RM5 stand mount, ZP1 zip pouch and WS5 windshield
- Matched Pair - 2 x RM5 stand mount, RC5 case and 2 x WS5 windshield

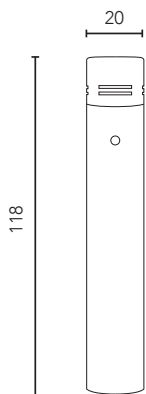

Polar Pattern



Frequency Response

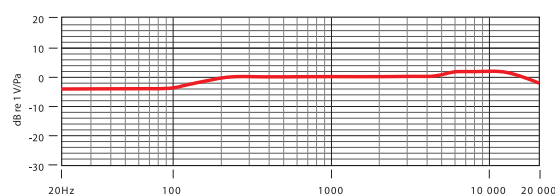

RØDE
MICROPHONES