



Pocket V-mount

50Wh and 99Wh Mini-size



SWIT's 3rd generation mini-size pocket V-mount camera battery with LED power info display and versatile DC interfaces including 65W USB-C and 8.4V DC.

The sleek design adds a touch of sophistication to your gear, making a statement on set or in any professional environment.

Power up your creativity with SWIT -where innovation meets reliability.





USB-C out←

USB-A out◀

Power Info Display

Pole-tap out Power bar

Display power percentage

Display remaining run time (touch or press the button)

Charging



Display charging percentage and progress bar is blinking



Display 3-Level Battery Health Status



Multiple DC Sockets

USB-A



USB-C	65W out, 30W in	OMNI-50S
030-0	65W out, 48W in	OMNI-998
	Power Laptop and Charging input	
Barrel	DC 8.4V (Reg.) 3A out	

5V 2A out

Connect dummy battery to power cameras

D-tap DC 14.4V 8A out **OMNI-5**0S DC 14.4V 12A out **OMNI-**99S

OMNI batteries adopt the highest capacity of Sanyo Lithium cells, and the mini-size is never compromized on power performance and interfaces.



Specifications


Model	OMNI-50S	OMNI-99S
Voltage	14.4V (11-16.8V)	14.4V (11-16.8V)
Capacity	50Wh/3.45Ah	99Wh/6.9Ah
Constant Load	100W/8A	150W/12A
D-tap	14.4V= 8A	14.4V== 12A
DC Barrel	8.4V(Reg.) = 3A	8.4V(Reg.) = 3A
USB-C	5V/ 9V/ 12V/ 15V/ 20V(Max) = 3.25A(65W) out; 1.5A(30W) in	5V/ 9V/ 12V/ 15V/ 20V(Max) = 3.25A(65W) out; 2.4A(48W) in
USB-A	5V/2A, 10W	5V/2A, 10W
Temperature	-20°C ~ +50°C	-20°C ~ +50°C
Size & Weight	102×74×33mm, 0.33kg	102×74×52mm, 0.55kg









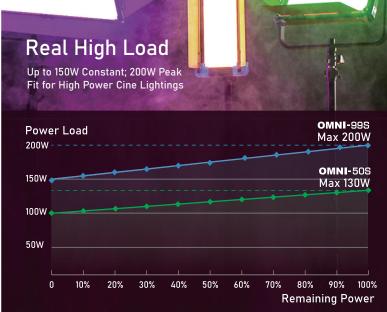







65W USB-C for Laptop

5V / 9V / 12V / 15V / 20V(Max)=3.25A BC1.2, QC2.0/3.0, FCP, SCP, PD2.0/3.0

USB-C Charging Time

OMNI-50S 30W in 2.5 hours OMNI-99S 48W in 2.75 hours





Facebook Page