

# H.265/264 SDI STREAMING ENCODER


Model No.:  
**SE1117**




**FEATURE** ○

- 1×SDI input, 1×SDI loop out, 1×Analog audio input
- Support H.265/ H.264 stream encode protocol, up to 1080p60hz
- Dual-stream (main stream and sub stream)
- RTSP, RTP, RTMPS, RTMP, HTTP, UDP, SRT, unicast and multicast
- Video and audio streaming or single audio streaming
- Image and text overlay
- Mirror image & upside-down image
- Live stream with no need for connecting a computer

## WAN Live Streaming

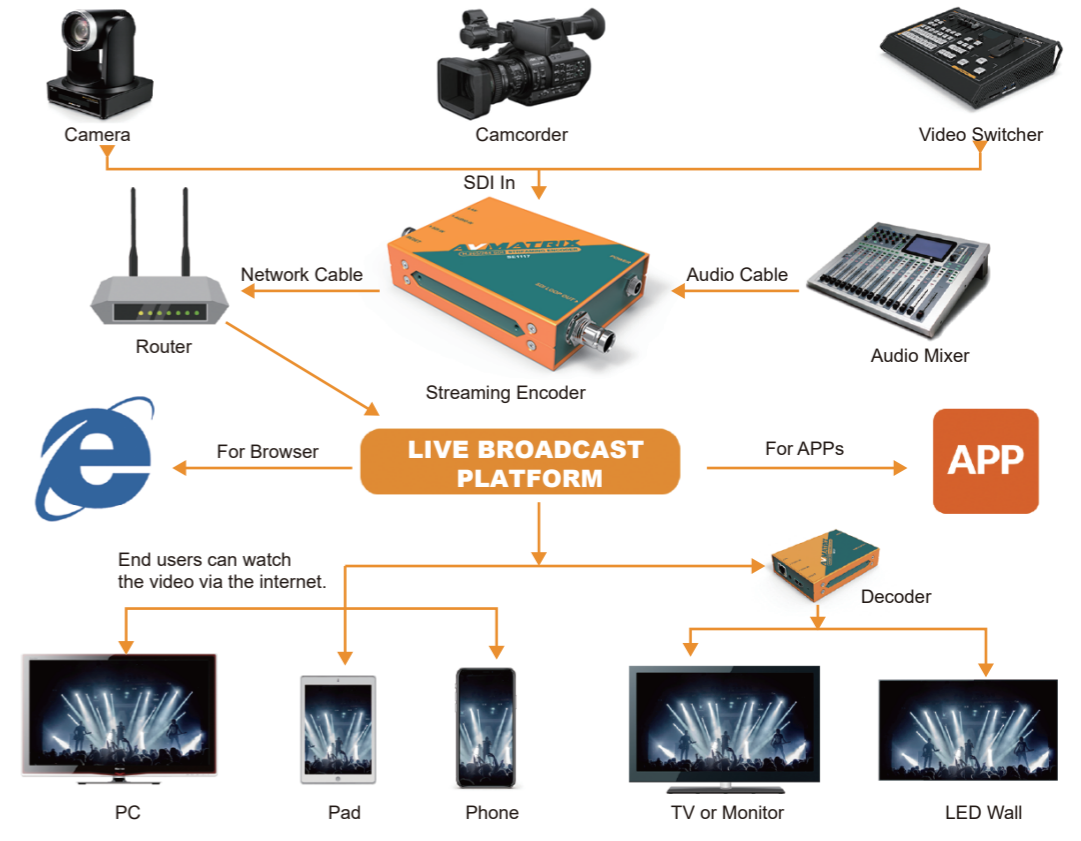

## LAN Live Streaming

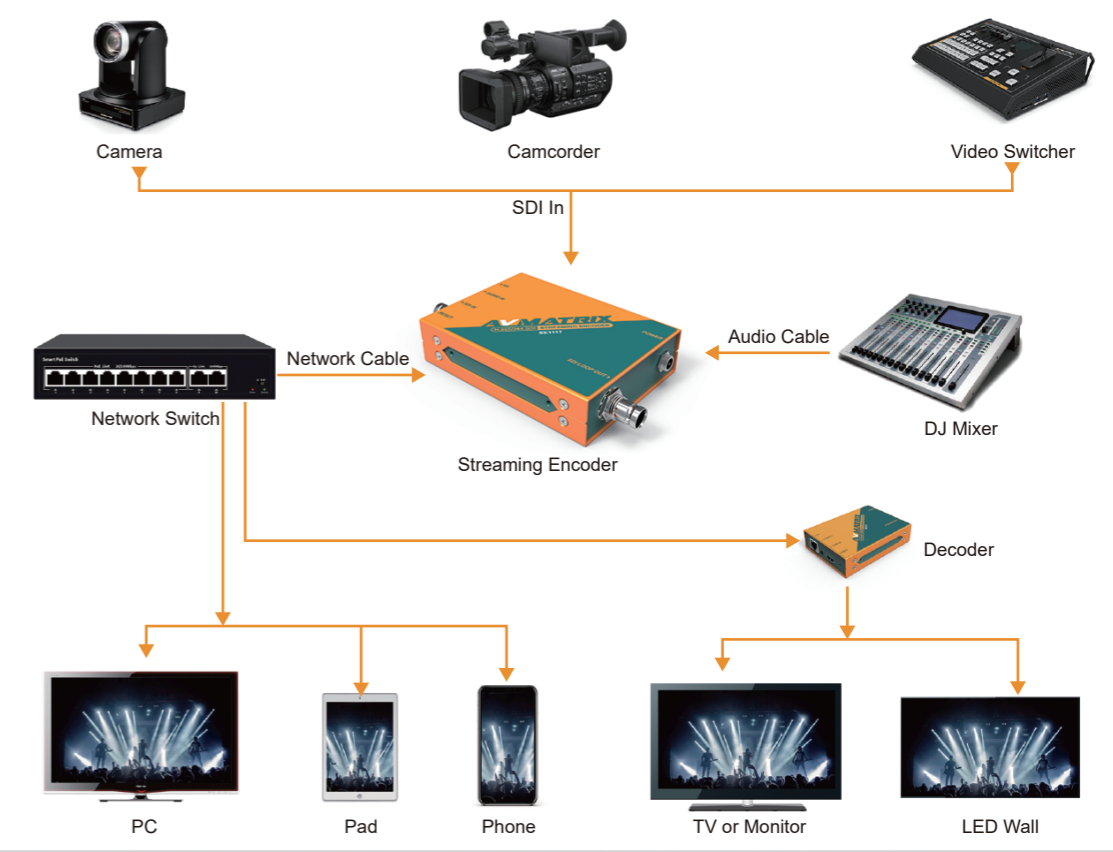


# LIVE STREAMING PLATFORMS

Support HTTP/RTSP/RTMPS/RTMP/RTP/UDP/ONVIF unicast and multicast protocol,  
Compatible with all major streaming video platforms.




# APPLICATION AREAS

Wide range of operations and various live streaming occasions

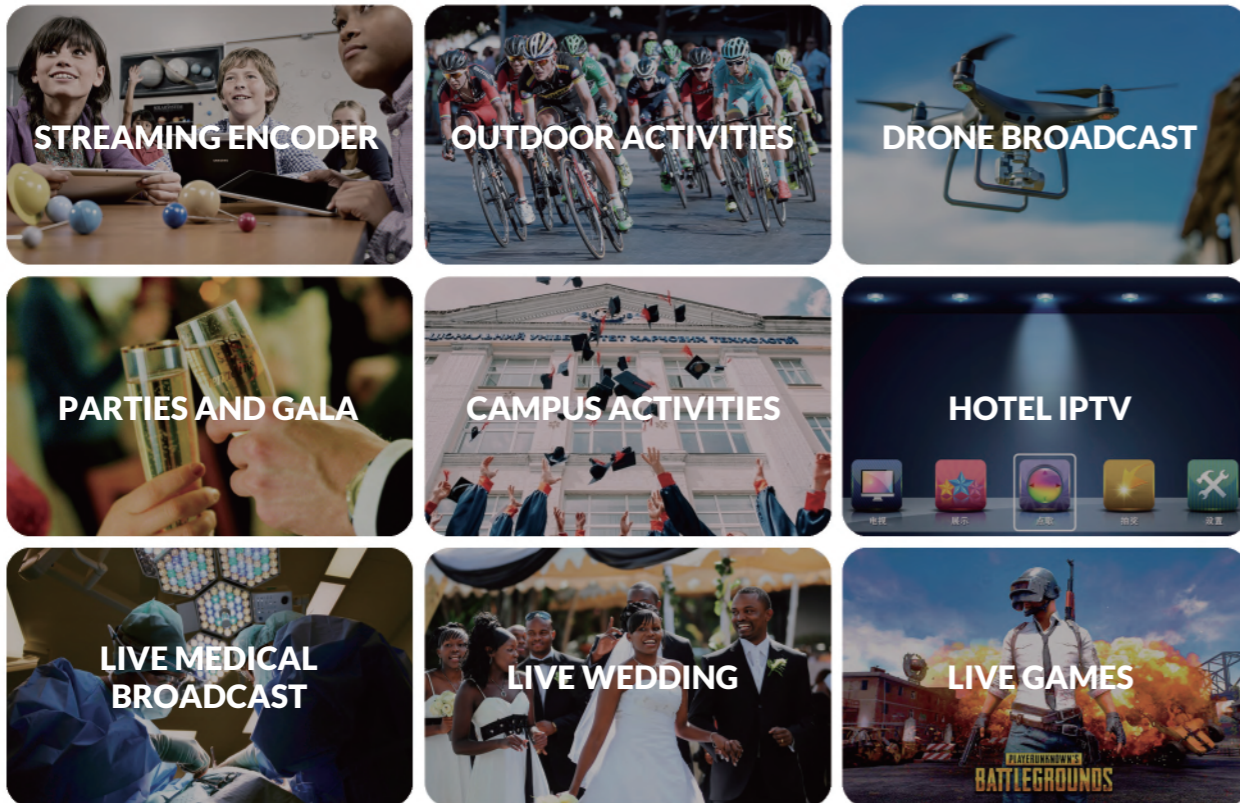

CONNECTIONS	
Video Input	SDI ×1
Video Loop Out	SDI ×1
Analog Audio In	3.5mm(line in)×1
Network	RJ-45×1(100/1000Mbps self-adaptive Ethernet)
STANDARDS	
SDI In Format Support	1080p 60/59.94/50/30/29.97/25/24/23.98/23.976, 1080i 50/59.94/60, 720p 60/59.94/50/30/29.97/25/24/23.98, 576i 50, 576p 50, 480p 59.94/60, 480i 59.94/60
Video Coding	H.265/ H.264
Video Bitrate	16Kbps ~ 12MKbps
Audio Coding	ACC/ MP3/ MP2/ G711
Audio Bitrate	24Kbps ~ 320Kbps
Encoding Resolution	1920×1080, 1680×1056, 1280×720, 1024×576, 960×540, 850×480, 720×576, 720×540, 720×480, 720×404, 720×400, 704×576, 640×480, 640×360
Encoding Frame Rate	5-60fps
SYSTEMS	
Network Protocols	HTTP, RTSP, RTMPS, RTMP, RTP, UDP, Multicast, Unicast, SRT
Configuration Management	Web configuration, Remote upgrade
OTHERS	
Consumption	5W
Temperature	Working temp: -0℃~40℃, Storage temp: -20℃~70℃
Dimension (LWD)	104×75.5×24.5mm
Weight	Net weight: 340g, Gross weight: 730g
Standard Accessory	12V 2A power supply
Optional Accessory	Mounting brackets

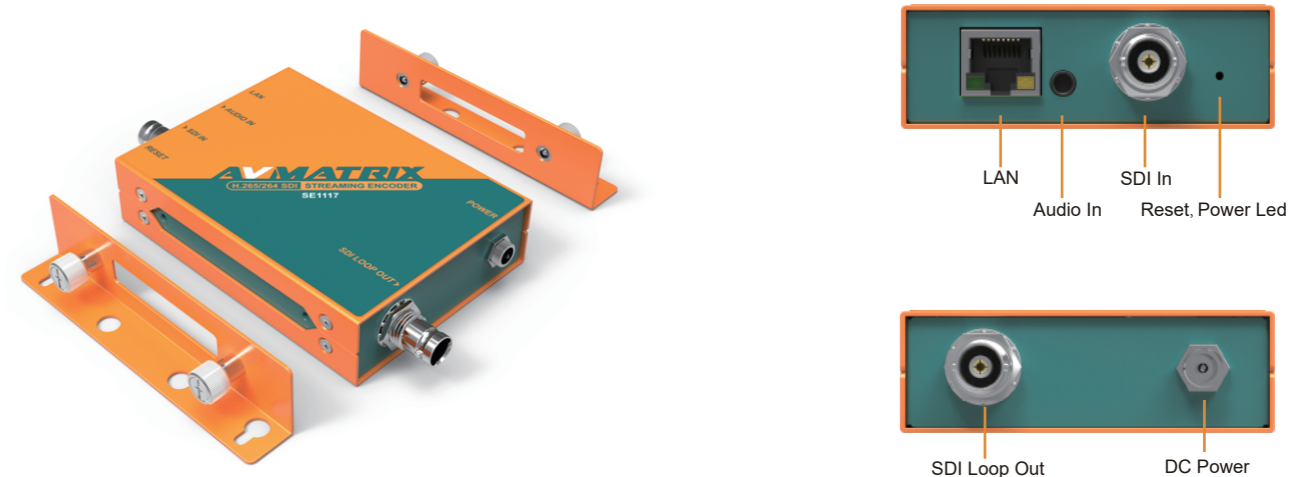

[WWW.AVMATRIX.NET](http://WWW.AVMATRIX.NET)

ZHANGZHOU MATRIX ELECTRONIC TECHNOLOGY CO., LTD.

Add: 26 Fuqi North Road, Lantian Economic Development Zone, Zhangzhou, Fujian, 363005, China  
Tel: +86-596-2103372/2109662 Fax: +86-596-2109611 Evmail: sales@avmatrix.net

