



**KINO FLO**  
Lighting Systems


# FreeStyle 41

## LED



**KINO FLO**  
MODEL: FS41F1  
CE  
S/N: 123456789

# FreeStyle 41 LED DMX

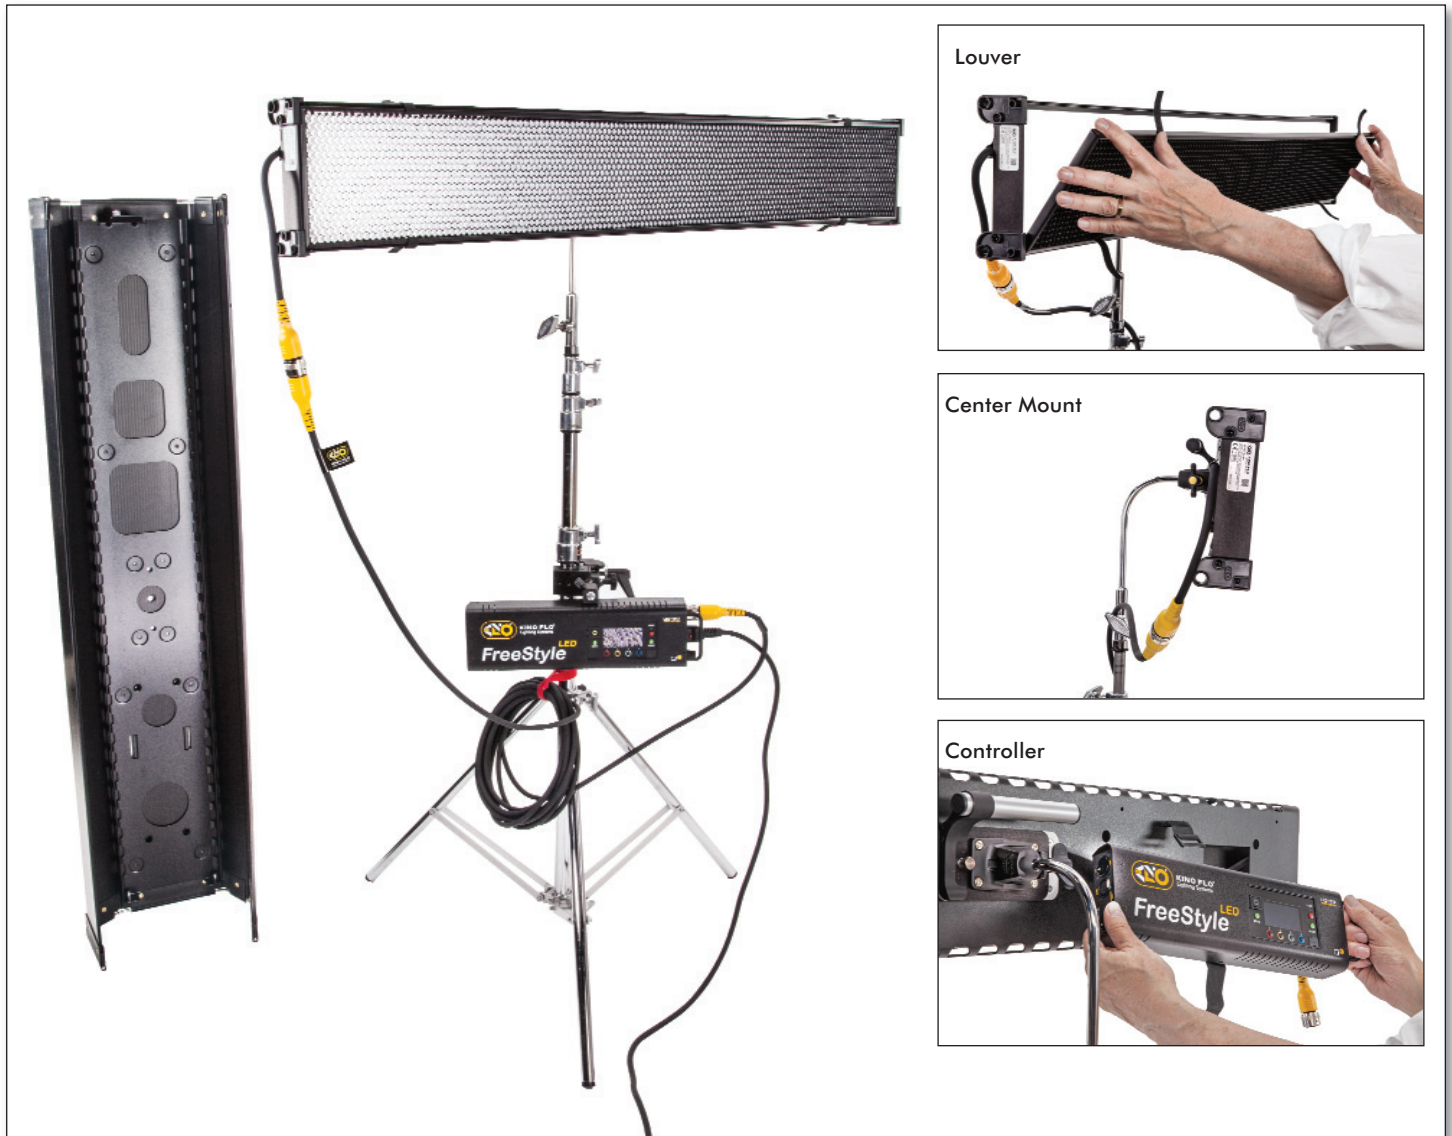

FreeStyle LED has three menu options, one white and two color menus. With white light Kelvin range is from 2700K to 6500K with **Dimming, Kelvin and Green/Magenta** control channels. In the color menu, Kelvin range is from 2500K to 9900K, with three additional channels, **Gel, Hue Angle and Saturation**. The Gel channel includes Kino Flo presets such as blue & green screen and over 100 well-known lighting gels. In addition, the Hue Angle and Saturation behave similar to a traditional color wheel, where you have white light in the center, and the Hue angle determines the color along a 360° range. And Saturation determines how much color is applied. The second color menu provides individual red, green, blue (**RGB**) control. For additional versatility, the FreeStyle LED panel can be easily removed from the housing and mounted onto a stand. The Gaffer Tray accessory allows further flexibility with its slim profile and center mount and screw points. The controller comes with standard DMX, wireless DMX (Lumen Radio®), universal voltage input 100-240VAC and 24VDC. It can be mounted to the fixture or run remotely with a 25ft extension cable.

#### Features include:

- Kelvin presets & custom settings, 2500K-9900K
- Dimming without color shift
- Green/Magenta control
- Dial in any color through Hue Angle and Saturation control
- Kino Flo presets and Gels
- Individual Red, Green, Blue (RGB) control
- Manual & DMX Dimming, DMX wireless (Lumen Radio)
- Removable fixture includes built-in Barndoors, Honeycomb Louver
- Twist-on, locking Center Mount and corner mount options
- KinoGrip Center Mount

#### ▼ FreeStyle 41 LED DMX Systems



**CFX-F41**  
FreeStyle 41 LED Fixture



**LED-151X-120U**  
FreeStyle 151 LED DMX Controller, Univ 120U



**LED-151X-230U**  
FreeStyle 151 LED DMX Controller, Univ 230U



**MTP-BG41**  
KinoGrip 41K Mount w/ Baby Receiver (16mm)



**X12-25**  
FreeStyle Extension, 25ft

▼ Photometrics

FreeStyle 41

FC	481	161	77	45	29	21	16	12	10	8
Feet	2	4	6	8	10	12	14	16	18	20
LUX	6840	2450	1210	712	462	325	242	189	153	123
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5

▼ Fixture Specifications

Fixture	Kelvin Range	Dimming Range	Dimensions	Weight
FreeStyle 41	2500-9900	100%-1%	52.5 x 9 x 4" w/ 6" barndoors (133.4 x 22.9 x 10.2cm w/ 15.3cm barndoors)	1.6 lb (7.3kg)
FreeStyle/GT 41	2500-9900	100%-1%	50 x 8 x 2.5" (127 x 20.3 x 6.4cm)	12.5 lb (5.7kg)
Panel 41 Only	2500-9900	100%-1%	49.5 x 7.5 x 2.5" (125.7 x 19.1 x 6.4cm)	9.6 lb (4.4kg)

▼ LED Controller Specifications

Controller	Input Voltage VAC	Amps VAC	Input Voltage VDC	Amps 24VDC	Kelvin Range	Dimming Range	Dimensions	Weight
LED-151X	100-240VAC, 50/60Hz, 150W	1.25A 0.65A	18-36VDC, 150W	6.25A	2500-9900	100%-1%	15 x 4.5 x 3" (38 x 11.5 x 8cm)	4.5 lb (2kg)

▼ Details



▼ FreeStyle 41 LED DMX Systems




SYS-F41U

FreeStyle 41 LED DMX System, Univ

Contents

- 1 FreeStyle 41 LED Fixture
- 1 FreeStyle 151 LED DMX Controller
- 1 MTP-BG41 Mount w/ Baby Receiver (16mm)
- 1 Extension, 25ft

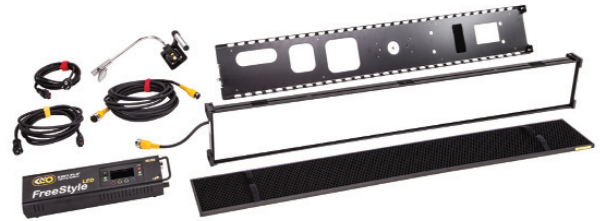

SYS-F41TU

FreeStyle/GT 41 LED DMX System, Univ

Contents

- 1 FreeStyle/GT 41 LED Fixture
- 1 FreeStyle 151 LED DMX Controller
- 1 MTP-BG41 Mount w/ Baby Receiver (16mm)
- 1 Extension, 25ft

▼ FreeStyle 41 LED DMX Accessories/ Cases



**SYS-BK12**  
Block/KF21 Single Battery System, 140Whr, 28.8V (2 x Battery)



**DFS-FS41-S**  
FreeStyle 41 SnapBag w/ 2x Diffusion



**MTP-KG41**  
KinoGrip 41K Mount w/ 3/8" Pin (10mm)



**MTP-BAL1**  
Kino Bal/Led Controller Mount (16mm)



**FIX-F41**  
FreeStyle 41 Fixture Shell



**LVR-FS440-S**  
FreeStyle 41 SnapGrid, 40°




**MTP-L**  
Kino 41 Lollipop w/ 3/8" Pin (10mm)



**STD-M36**  
Medium Duty, 36"  
**STD-M30**  
Medium Duty, 30"



**FIX-F41TT**  
FreeStyle/GT 41 Gaffer Tray



**LVR-SL490-P**  
FreeStyle 41 Louver/HP, 90°  
**LVR-SL460-P**  
FreeStyle 41 Louver/HP, 60°



**MTP-LBC**  
Kino 41 Lollipop w/ Baby Receiver Curve (16mm)



**KAS-FS41-C**  
FreeStyle 41 Travel Case



**PAN-F41**  
FreeStyle 41 LED Panel



**MTP-BG41S**  
KinoGrip 41K Mount w/ Baby Receiver Short (16mm)



**MTP-B41F**  
Kino Offset w/ Baby Receiver (16mm)



**KAS-FS43**  
FreeStyle 41 Fixture (3) Ship Case

# FreeStyle 41 LED DMX Kits

## ▼ FreeStyle 41 LED DMX Kits



### KIT-F41U

FreeStyle 41 LED DMX Kit, Univ w/ Travel Case

#### Contents

- 1 FreeStyle 41 LED Fixture
- 1 FreeStyle 151 LED DMX Controller
- 1 MTP-BG41 Mount w/  
Baby Receiver (16mm)
- 1 Extension, 25ft
- 1 Travel Case

#### Dimensions

54.5 x 21 x 9"  
(138.5 x 53.5 x 23cm)

#### Weight

49 lb  
(22.2kg)



### KIT-F41TU

FreeStyle/GT 41 LED DMX Kit, Univ w/ Travel Case

#### Contents

- 1 FreeStyle/GT 41 LED Fixture
- 1 FreeStyle 151 LED DMX Controller
- 1 MTP-BG41 Mount w/  
Baby Receiver (16mm)
- 1 Extension, 25ft
- 1 Travel Case

#### Dimensions

54.5 x 21 x 9"  
(138.5 x 53.5 x 23cm)

#### Weight

46 lb  
(20.9kg)



Kino Flo Lighting Systems  
2840 North Hollywood Way  
Burbank, CA 91505

+1 818 767 6528 voice +1 818 767 7517 fax

[www.kinoflo.com](http://www.kinoflo.com)

© Kino Flo FreeStyle 41  
No. 3110115 Rev A