

Spotlight Mount




Specifications


Brightness with different light fixture at different distance

Distance	Product	19° Spotlight Mount			26° Spotlight Mount		36° Spotlight Mount	
		Lux No modifier	Lux	Beam Diameter	Lux	Beam Diameter	Lux	Beam Diameter
1m	C120d II	6100	62200	25cm	37500	42cm	19620	60cm
	C120d	3900	37300	25cm	24450	42cm	12970	60cm
	C300d	9050	60000	25cm	46600	42cm	32500	60cm
1.5m	C120d II	2464	23590	42cm	13900	66cm	8040	90cm
	C120d	1742	15740	42cm	9910	66cm	5870	90cm
	C300d	3770	24330	42cm	20100	66cm	12350	90cm
3m	C120d II	711	6280	90cm	3620	133cm	2175	180cm
	C120d	457	3860	90cm	2387	133cm	1376	180cm
	C300d	1109	5970	90cm	4910	133cm	3250	180cm
5m	C120d II	300	2283	154cm	1281	220cm	772	300cm
	C120d	187	1435	154cm	855	220cm	509	300cm
	C300d	460	2300	154cm	1872	220cm	1270	300cm
10m	C120d II	105.3	554	314cm	318	440cm	196.8	600cm
	C120d	72.9	372	314cm	232	440cm	144.5	600cm
	C300d	161.3	560	314cm	498	440cm	332.7	600cm

19°

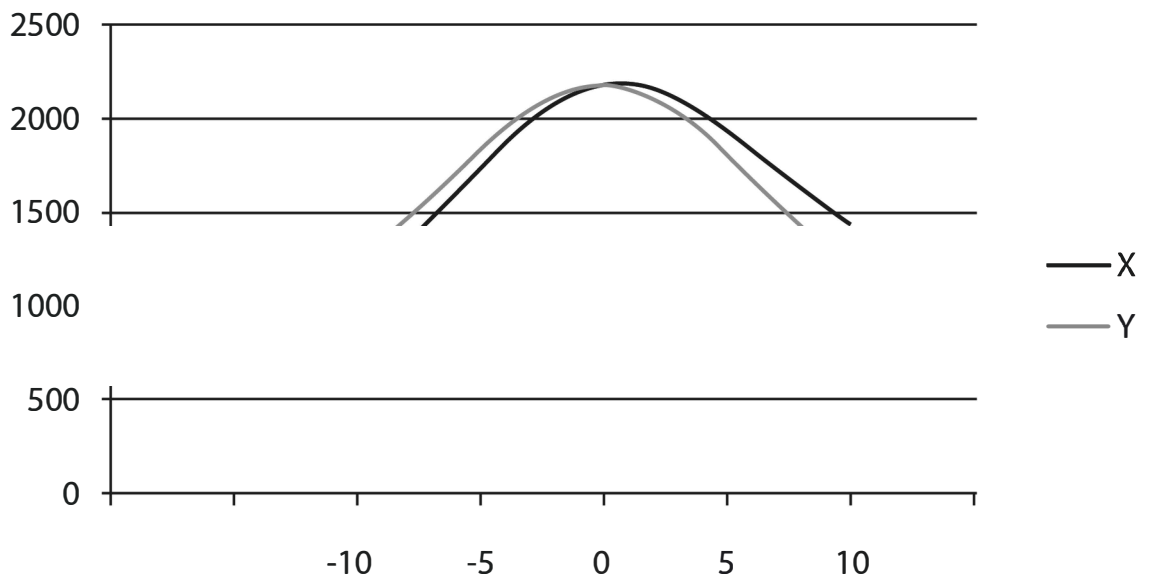

26°

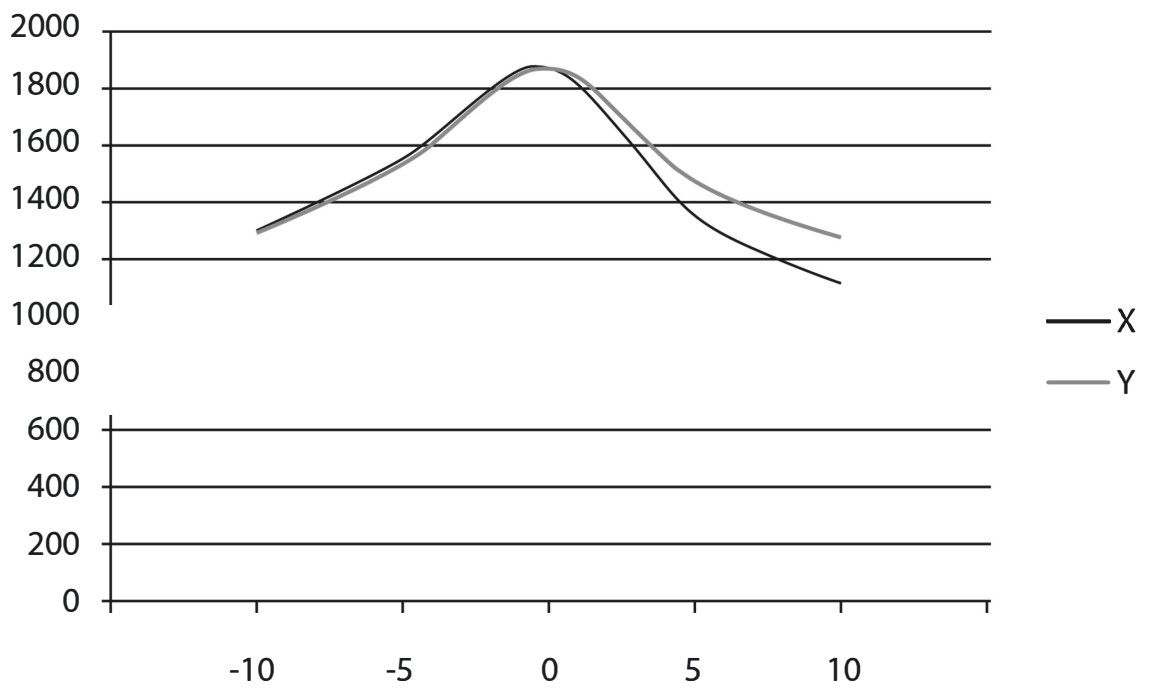

36°

